


**BB12 Series**

	<b>BB1248</b>	<b>BB1254</b>	<b>BB1260</b>	<b>BB1266</b>	<b>BB1272</b>
<b>Working Width</b>	48" (1.22 m)	54" (1.37 m)	60" (1.52 m)	66" (1.68 m)	72" (1.83 m)
<b>Capacity</b>	9.4 cu. ft. (0.27 cu m)	10.57 cu. ft. (0.30 cu m)	11.75 cu. ft. (0.33 cu m)	12.92 cu. ft. (0.37 cu m)	14.1 cu. ft. (0.40 cu m)
<b>Weight</b>	316 lbs (143.3 kg)	325 lbs (147.4 kg)	346 lbs (156.9 kg)	370 lbs (167.8 kg)	404 lbs (183.3 kg)
<b>Number of Shanks</b>	4	4	4	5	6
<b>Shank Material</b>	3/4" x 2 1/2" x 15" (1.9 cm x 6.4 cm x 38.1 cm) heat treated spring steel				
<b>Vertical Shank Positions</b>	3- positions (2 1/4" (5.7 cm) above scraper end plates; 1/4" (6 mm) and 2 3/4" (7.0 cm) below scraper end plates)				
<b>Shank Tip Construction</b>	Replaceable heat treated dimpled-on tips				
<b>Shank Beam</b>	4" x 4" x 1/4" (10.2 cm x 10.2 cm x 0.6 cm) Manufactured shank tube				
<b>Shank Lift Mechanism</b>	Manual lift with spring retainer at each shank				
<b>Moldboard</b>	Bumped-formed moldboard 15 3/8" (39.1 cm) vertical height				
<b>Side Panels</b>	3/16" (5 mm) thick x 16" (40.6 cm) high x 24" (61.0 cm) deep				
<b>Depth of Bucket</b>	23 1/8" (58.7 cm)				
<b>Bucket Reinforcement</b>	Two welded braces to rear of bucket				
<b>Cutting Blades</b>	2 ea. 3/8" x 6" (10 mm x 15.2 cm) high carbon, heat treated cutting edges; reversible and replaceable				
<b>Maximum H.P. Rating</b>	30 Hp (22.4 kw)				
<b>A-Frame Material</b>	1/2" x 3" (13mm x 76 mm)				
<b>3-Point Hitch Type</b>	Double strap lower hitch Cat. I (Fits Land Pride Quick Hitch)				

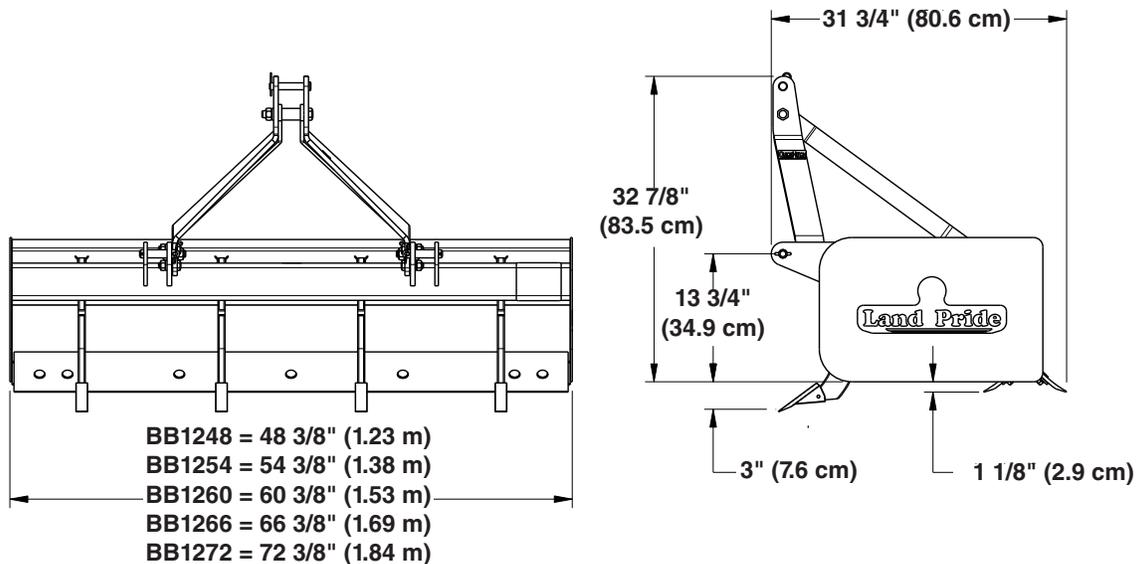

30737